


SMS-CTP

Centralized Control Panel
 smartSMS-NET Sound Masking System


- Simple and easy masking sound and music volume adjustment in any zone,
- 7" Capacitive Touch Screen,
- Wall-Mount for sleek design,
- Password access,
- Ethernet or WiFi connectivity,
- Flexible power supply with PoE or 9-36Vdc.



On screen volume control to display and access all projects and zones:

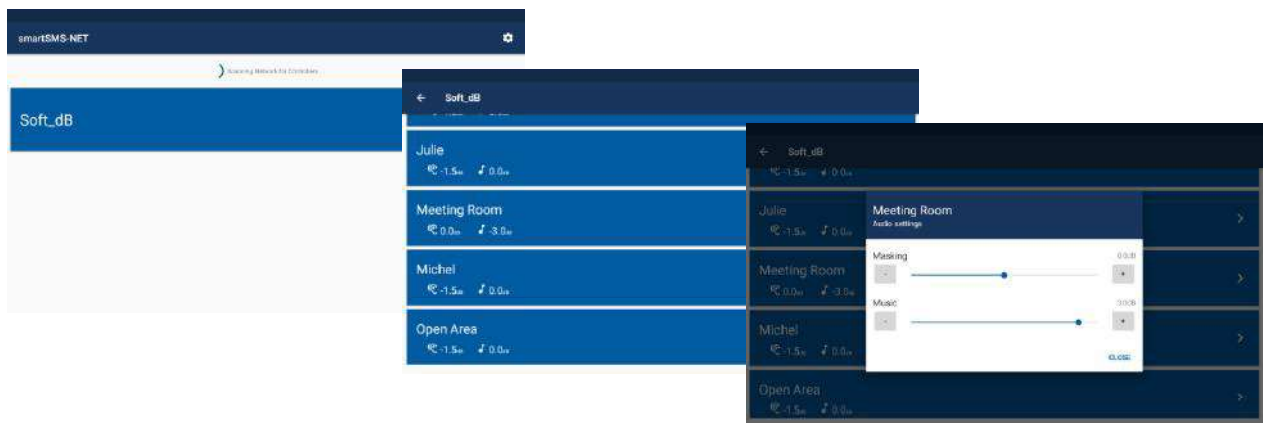

Ethernet or WiFi Connectivity:

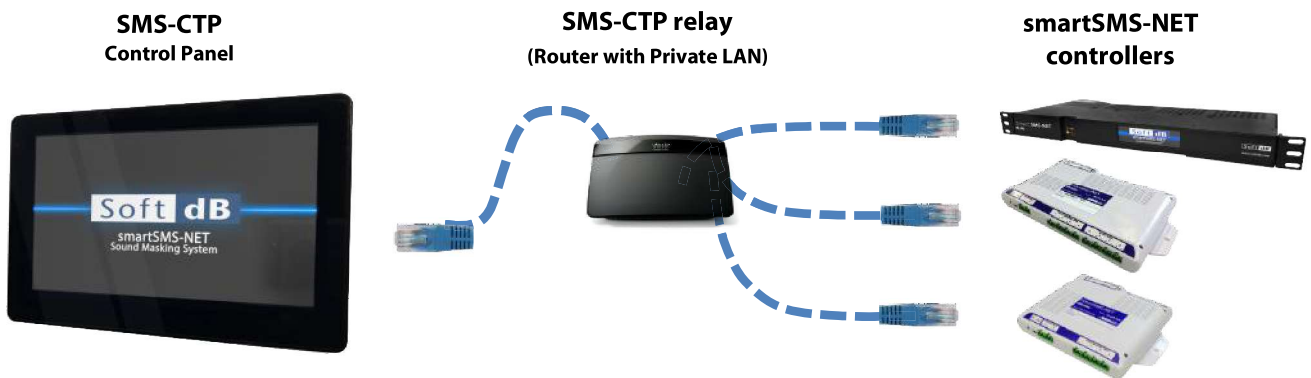


V20190702

Specifications

Volumes	
Sound Masking	±10 dB with respect to calibrated sound masking level
Music	30 dB
Connectivity	
Connectivity	TCP/IP
Interfaces	Ethernet (RJ45) or WiFi (802.11b/g/n, <u>WiFi radio module can be disabled if not required</u>)
Protocol	Proprietary
Screen	
Size	7 inch (178mm)
Resolution	1024 x 600
Brightness	350 cd/m ²
Touch Panel Technology	Capacitive
Power	
Powering Options	PoE or DC barrel connector
DC Barrel Connector	9-36VDC, Power-Supply provided
PoE (Power over Ethernet)	48V, IEEE 802.3.af (optional PoE injector available)
Power Rating	Max 15W
Physical	
Size	182mm x 121mm x 25mm (7.2" x 4.75" x 1")
Weight	0.9lb (400g)
Mounting	Wall-mount bracket
Options	
Locked Guard Box	Key-locked clear polycarbonate box, 248mm x 184mm x 86mm (9.75" x 7.25" x 3.33")
PoE Injector	19W IEEE 802.3af PoE injector supporting 10/100 Mbps

Very easy to install with mounting bracket using screws or adhesive pad:

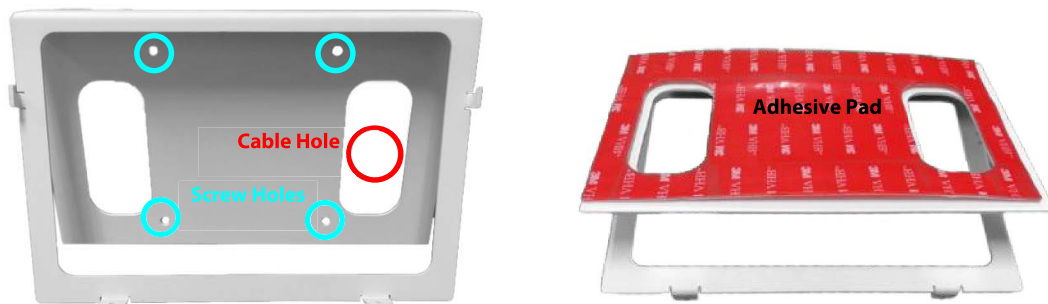

V20190702

